FINISH LEGEND

FLOORS	BASE	WALLS
CNC (SEALED CONCRETE) CPT-1A (CARPET TILE) MFR: SHAW CONTRACT TYPE: CHROMATONE - 5T444 COLOR: INDIGO CHARCOAL - 07485 SIZE: 18" X 36" INSTALLATION: BRICK CPT-1B (CARPET TILE) MFR: SHAW CONTRACT TYPE: SATURATE - 5T109 COLOR: INDIGO CHARCOAL - 07485 SIZE: 9" X 36" INSTALLATION: BRICK CPT-2 (CARPET TILE) MFR: SHAW CONTRACT TYPE: THINK TILE COLOR: TRANFORM SIZE: 24" X 24" INSTALLATION: QUARTER TURN CPT-3 (CARPET TILE) MFR: SHAW CONTRACT TYPE: JIVE TILE - 5T412 COLOR: STEP - 12549 SIZE: 24" X 24" INSTALLATION: QUARTER TURN ETR - EXISTING TO REMAIN LVT-1 (LUXURY VINYL TILE) MFR: SHAW CONTRACT TYPE: INSPIRE 0884V COLOR: EXPERIENCE 84595 SIZE: 12" X 24" INSTALLATION: BRICK SDT-1 (STATIC DISSIPATIVE TILE) MFR: TARKETT TYPE: iQ GRANIT SD VINYL TILE GROUNDED TO AN OUTLET PTF-1 (PORCELAIN TILE FLOOR) MFR: DALTILE TYPE: SLATE ATTACHE SIZE: 2" X 2" MOSAIC GROUT: TEC POWER 939 SV-1 (SHEET VINYL) MFR: TARKETT TYPE: ARIA- MELODY 3.0 COLOR: BEACH STONE SIZE: ROLL WELD ROD:	RB-1 (RUBBER BASE) MFR: TARKETT TYPE: 4", COVE COLOR: GATEWAY	FRP-1 (FIBERGLASS REUNFORCED PANELS) MFR: CRANE COMPOSITES PRODUCT: VARIETEX LINEN TEXTURE COLOR: COTTON WHITE (1130) PT-1 (PAINT) MFR: SHERWIN WILLIAMS COLOR: SW 7004 SNOWBOUND PT-2 (PAINT) MFR: SHERWIN WILLIAMS COLOR: SW 7658 GRAY CLOUDS PT-3 (PAINT) MFR: SHERWIN WILLIAMS COLOR: 7067 CITYSCAPE WT-1 (WALL TILE) MFR: DALTILE TYPE: COLOR WHEEL SIZE: 4" X 12" COLOR: MATTE ARTIC WHITE GROUT: TEC POWER 939
	CEILINGS	**CASEWORK**
	ACT-1 (ACOUSTICAL CEILING TILE) MFR: ARMSTRONG WORLD INDUSTRIES PATTERN: DUNE 2'X2' TEGULAR #1774 COLOR: WHITE GRID: 15/16" PRELUDE ETR (EXISTING TO REMAIN) EXP (EXPOSED CEILING) PAINTED PER SCHEDULE GWB (GYPSUM WALLBOARD) OTS (OPEN TO STRUCTURE)	SCW (METAL CASEWORK) EPOXY COUNTERTOP- MFR: DURCON INCORPERATED COLOR: GRAPHITE METAL BASE- MFR: KEWAUNEE SCIENTIFIC CORPORATION COLOR: SNOW WHITE PL-1 (PLASTIC LAMINATE) MFR: FORMICA COLOR: WHITE SS-1 (SOLID SURFACE) MFR: CORIAN COLOR: JUNIPER

FINISH NOTES

1. PLASTIC LAMINATE CASEWORK (PL-1) TO HAVE 4"H BACK AND SIDE SPLASHES.
2. ALL BASE IS TO BE RB: TARKETT RUBBER 4" COVE BASE, UNLESS NOTED OTHERWISE.
3. WALL TILE UP TO 7'-0" WITH SCHLUTTER JOLLY EDGE AT ALL EXPOSED EDGES AND METAL COVE-PROFILE BASE
4. ALL WALLS ARE TO BE PAINTED, UNLESS NOTED OTHERWISE.
5. ALL GYPSUM WALL BOARD CEILINGS ARE TO BE PAINTED, UNLESS NOTED OTHERWISE.
6. ALL WINDOW SILLS ARE TO BE SOLID SURFACING.
7. FRP UP TO 4'-0" AT WALLS BEHIND MOP SINK.
8. TOILET PARTITIONS GENERAL PARTITIONS HDPE 501 HAMMERED STAINLESS STEEL HIGH DENSITY POLYMER.
9. METAL LOCKERS ON CONCRETE BASE WRAPPED WITH TILE.
10. ETR = EXISTING TO REMAIN
11. EX. SKYLIGHT W/ BULKHEAD.

ROOM FINISH SCHEDULE

NO	ROOM NAME	FLOOR FINISH	BASE FINISH	WALL FINISH NORTH	WALL FINISH EAST	WALL FINISH SOUTH	WALL FINISH WEST	CASEWORK VERTICAL	CASEWORK HORIZONTAL	CEILING MATL	CEILING FINISH	REMARKS
Not Placed												
212	OFFICE	CPT-1B	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ETR		
FIRST FLOOR												
101	RECEPTION	CPT-3	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
102	STAIR	ETR	ETR	PT-1	PT-1	PT	PT-1	--	--	ETR		
103	CORRIDOR	CPT-1	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
104	TRUCKERS' RESTROOM	PFT-1	WT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	--	--	GWB	PT-1	3.
105	CORRIDOR	CPT-1A	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
106	CONFERENCE ROOM	CPT-2	RB-1	PT-2	PT-1	PT-1	PT-1	--	--	ACT-1		
107	BREAK ROOM	LVT-1	RB-1	PT-1	PT-1	PT-1	PT-1	PL-1	SS-1	ACT-1		
108	CORRIDOR	CPT-1A	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
109	WOMEN'S RESTROOM	PFT-1	WT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	PL-1	SS-1	ACT-1	PT-1	3.
109A	RESTROOM VESTIBULE	PFT-1	WT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	--	--	GWB	PT-1	
109C	SHOWER	PFT-1	WT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	--	--	GWB	PT-1	
110	JANITOR	CNC.	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
111	MEN'S RESTROOM	PFT-1	WT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	PL-1	SS-1	GWB	PT-1	3.
111A	RESTROOM VESTIBLUE	PFT-1	WT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	--	--	ACT-1	PT-1	
111C	SHOWER	PFT-1	WT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	WT-1, PT-1	--	--	GWB	PT-1	
112	ELECTRICAL	CNC.	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	OTS		
113	ELECTRICAL	CNC.	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	OTS		
114	ELECTRICAL	CNC.	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	OTS		
115	LAB	SV-1	RB-1	PT-1	PT-1	PT-1	PT-1	SWC	SWC	ACT-1		
116	FIRE RISER CLOSET	CNC.	NA	--	--	--	--	--	--	OTS		
117	MECHANICAL ROOM	CNC.	--	PT-1	PT-1	PT-1	PT-1	--	--	OTS		
118	SHIPPING RECEIVING OFFICE	CPT-1	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
119	STORAGE	CNC.	ETR	PT-1	PT-1	PT-1	PT-1	--	--	OTS		
171	CONTROL ROOM											
172	ELECTRICAL											TBD
173	BOILER											
OFFICE 2ND FLOOR												
201	STAIR	ETR	ETR	PT-1	PT-1	PT-1	PT-1	--	--	ETR		
202	OPEN OFFICE	CPT-1A	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1, GWB	PT-1	11.
203	GUEST CUBICLES	CPT-1A	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1, GWB	PT-1	11.
204	OFFICE	CPT-1B	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
205	OFFICE	CPT-1B	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ETR		
206	CORRIDOR	CPT-2	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
207	OPEN OFFICE	CPT-1A	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
208	IT	SDT-1	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	GWB	PT-1	
209	CORRIDOR	CPT-1A	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
210	STORAGE	CNC.	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	GWB		
211	OFFICE	CPT-1B	RB-1	PT-1	PT-1	PT-1	PT-1	--	--	ACT-1		
213	CONFERENCE ROOM	CPT-2	RB-1	PT-1	PT-2	PT-1	PT-1	--	--	ACT-1, GWB	PT-1	11.
214	CONFERENCE ROOM	CPT-2	RB-1	PT-2	PT-1	PT-1	PT-1	--	--	ACT-1		
215	CONFERENCE ROOM	CPT-2	RB-1	PT-2	PT-1	PT-1	PT-1	--	--	ACT-1, GWB	PT-1	11.

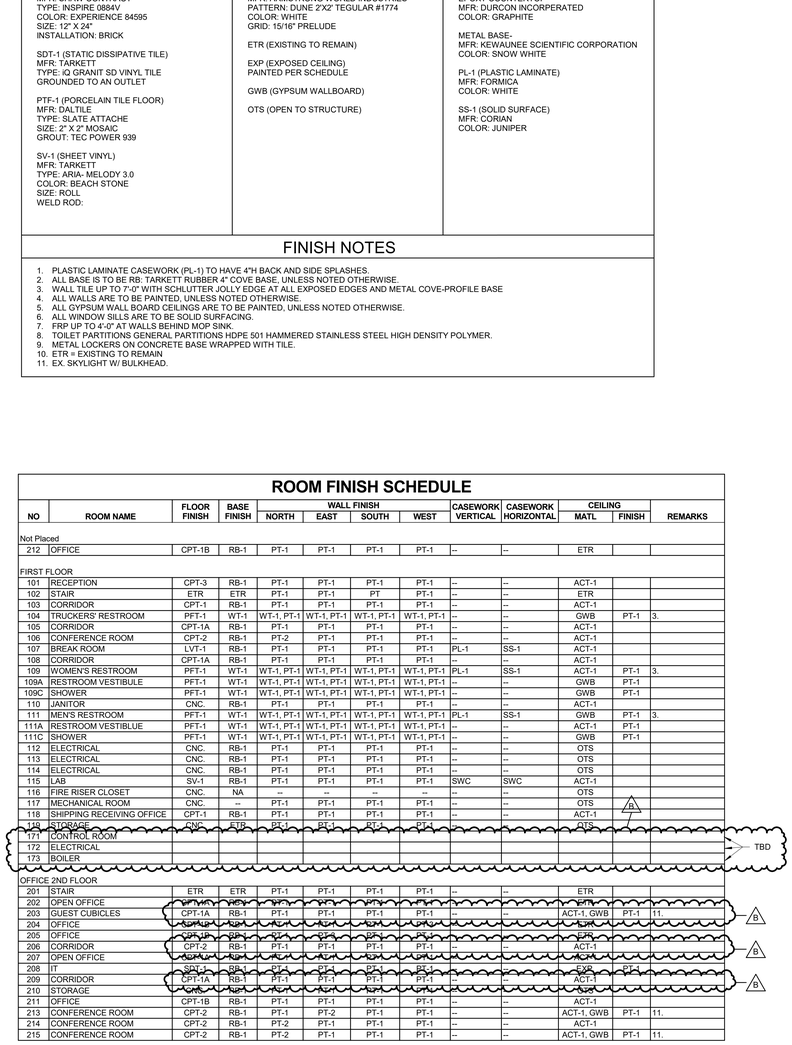

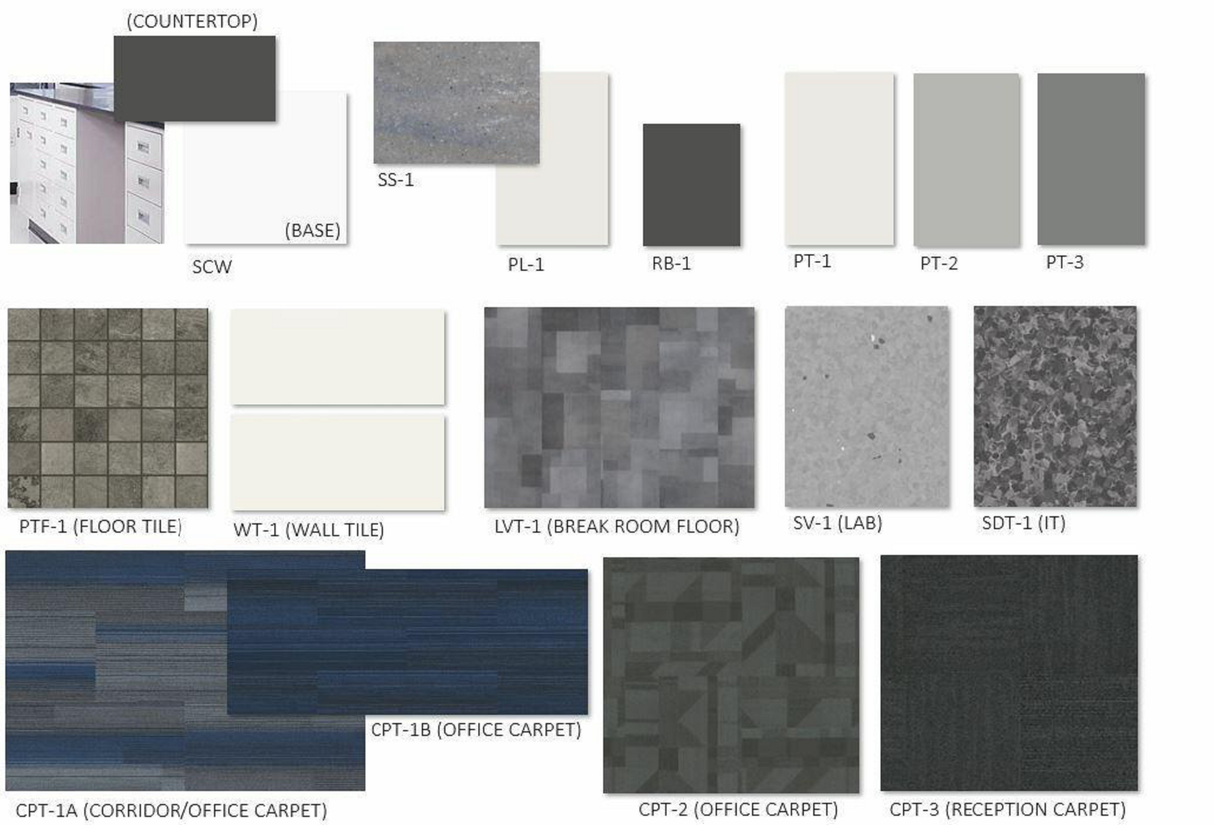

ASCEND ELEMENTS

FINISH BOARD

SSOE | S&W

ssoe®

CONSULTANTS:

Issued For
BULLETIN
05/25/2022
www.ssoe.com

SEAL ON THIS DOCUMENT AUTHORIZED BY:

PROJECT INFORMATION:

BROWNFIELD MODIFICATIONS

CLIENT INFORMATION:

ASCEND ELEMENTS

ASCEND ELEMENTS
9172 INDUSTRIAL DR NE
COVINGTON, GA
30014

CLIENT PROJECT NO: XXX-XXXXX-XX

NO.	DATE	SUBJECT
B	05-24-22	ISSUED FOR BULLETIN 1 - PKG 11C02
A	04-28-22	ISSUED FOR CONSTRUCTION

REVISION OR ISSUE

SSOE, Inc.
1001 Madison Avenue
Toledo, OH 43604
T. (419) 255-3830

PROJECT NO: 021-01975-00
PROJECT MANAGER: R. FOX
DESIGNED: J. HAINES
CHECKED: S.HUFF

DRAWING TITLE:
ROOM FINISH SCHEDULE & LEGEND

DRAWING NO:
AE-610-1

BIM 360://Battery Resources Brownfield Modifications/021019750O_A20_SSOE.rvt
DATE: 5/25/2022 11:01:16 AM